



Prof. Surajit Dhara

SACT,


Dept. Of Physics, Narajole Raj College

**C3T ( Electricity and Magnetism) , Topic :- Electromagnetic Induction**

❖ **Introduction :** Whenever there is a relative motion between a closed circuit and a magnet or a current in an auxilliary coil circuit changes i.e. magnetic flux linked up through a coil changes then an emf is produced through the coil, hence a current flows through the circuit. This phenomena is called electromagnetic induction.

The emf. Produced due to electromagnetic induction is called induced emf.

The current produced due to electromagnetic induction is called induced current.

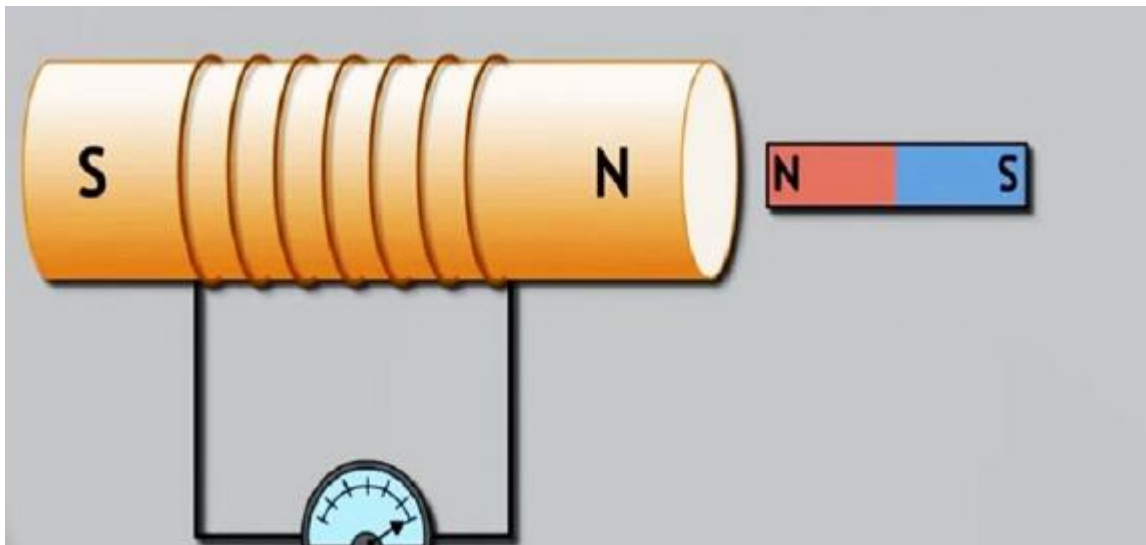

❖ **Laws of Electromagnetic Induction** : Faraday gives two laws and Lenz gives another law related to electromagnetic induction.

- **1<sup>st</sup> Law ( Faraday)** – Whenever there is a variation of magnetic lines of force linked up with the coil, at that moment an induced emf is produced.
- **2<sup>nd</sup> Law (Faraday)** – The magnitude of induced emf in a closed circuit (or coil) is proportional to the rate of change of magnetic flux linked up with coil.
- **3<sup>rd</sup> Law (Lenz)** - The direction of induced current (or emf) will be such that it tends to oppose the very cause of it.

If  $|e|$  be the magnitude of induced emf due to change in flux  $\partial\phi$  in time  $dt$  linked up with a coil, then

$$|e| \propto \frac{\partial\phi}{\partial t}$$

$$\text{or, } |e| = k \frac{\partial\phi}{\partial t}$$

If rate of change of flux linked up with a coil is unity then induced produced within it is also unity

$$\text{i.e. } \frac{\partial\phi}{\partial t} = 1 \text{ then } |e| = 1 \text{ hence } k = 1$$

$$\therefore |e| = \frac{\partial\phi}{\partial t}$$

According to Lenz's law,

$$e = -\frac{\partial\phi}{\partial t}$$

❖ **Differential form of Faraday's Law** : We know that, Faraday's law of electromagnetic induction

$$e = -\frac{\partial\phi}{\partial t} \quad \dots(1)$$

Again magnetic flux associated with an elementary area  $ds$ ,  $d\phi = \vec{B} \cdot \hat{n} ds$

$$\text{Or, } \phi = \int \vec{B} \cdot \hat{n} ds$$

Again induced emf generated in a closed current curve is equal to workdone to rotate a unit positive charge in a closed orbit.

$$\begin{aligned} \text{i.e. } e &= \oint \vec{F} \cdot d\vec{l} \text{ for } q = +1 \\ &= \oint \vec{E} \cdot d\vec{l} \text{ as } \vec{F} = q\vec{E} \end{aligned}$$

Putting in equation (1) , we get,

$$\oint \vec{E} \cdot d\vec{l} = - \int \frac{\partial \vec{B}}{\partial t} \cdot \hat{n} ds$$

$$\text{Or, } \int \vec{\nabla} \times \vec{E} \cdot \hat{n} ds = - \int \frac{\partial \vec{B}}{\partial t} \cdot \hat{n} ds$$


According to Stokes theorem.

$$\text{Or, } \int (\vec{\nabla} \times \vec{E} + \frac{\partial \vec{B}}{\partial t}) \cdot \hat{n} ds = 0$$

$$\boxed{\vec{\nabla} \times \vec{E} = - \frac{\partial \vec{B}}{\partial t}}$$

as  $ds \neq 0$

❖ **Self Induction:** Due to change in own current through a coil, as magnetic flux associated with it changes, hence an induced emf is produced within it. This phenomena is called self induction.

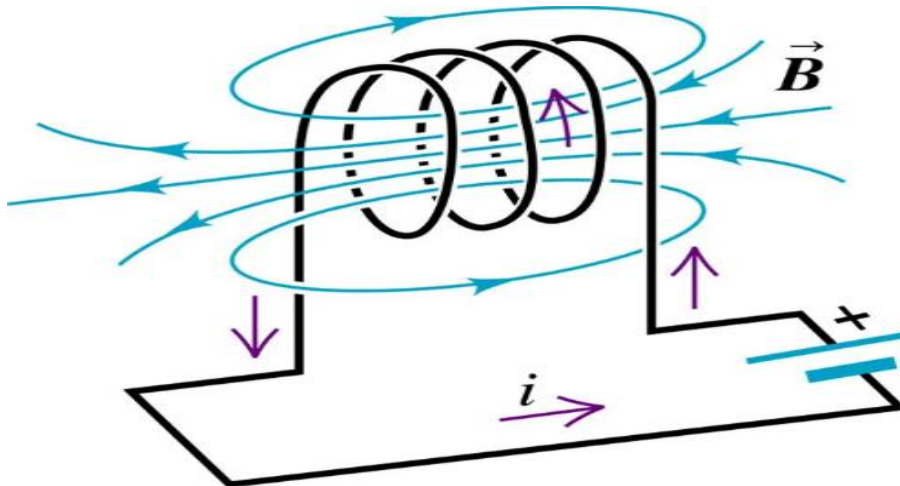

- Magnetic flux through a coil ( $\phi$ ) is linearly proportional to the current ( $i$ ) passing through it. i.e.  $\phi \propto i$

$$\phi = Li$$

Where L is called self inductance or coefficient of self induction

Again

$$e = -\frac{\partial\phi}{\partial t}$$


$$= -\frac{d(Li)}{dt}$$

$$e = -L\frac{di}{dt}$$

- **Self Inductance:**  $\phi = Li$  ; When  $i=1$  then  $\phi = L$ . When unit current flows through a circuit then the numerical value of flux associated with the coil is called self inductance of that coil.

- **Unit :** S.I unit of self inductance – Henry.

❖ **Mutual Induction:** When two coils are closed together, then due to change in current in one coil, induced emf is produced in the another coil. This phenomena is called mutual induction.

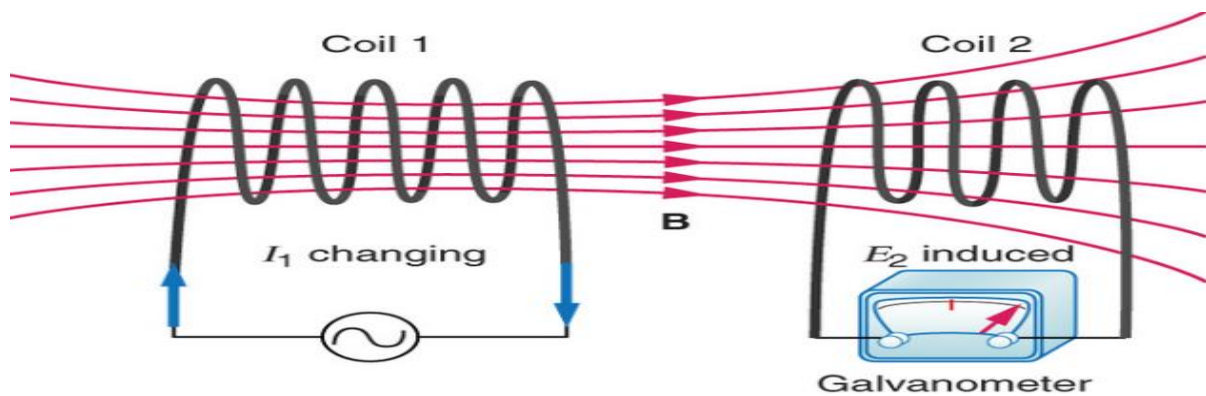

Magnetic flux associated with the 1<sup>st</sup> coil ( $\phi_1$ ) is proportional to the current in the second coil ( $i_2$ )

$$\phi_1 \propto i_2$$

$$\text{Or, } \phi_{12} = M_{12}i_2$$

Similarly ,  $\phi_{21} = M_{21}i_1$   
Actually,  $M_{12} = M_{21}$   
Hence  $\phi_{21} = Mi_1$

$$\phi_{12} = Mi_2$$

Induced emf ,

$$e_{21} = -\frac{d\phi_{21}}{dt}$$

$$\therefore e_{21} = -M \frac{di_1}{dt}$$

Where  $M$  is called mutual inductance or coefficient of mutual induction.

- **Mutual Inductance** :  $\phi_{12} = Mi_2$  ; When  $i_2 = 1$  then  $\phi_{12} = M$  i.e when unit current flows through one circuit, then numerical value of flux associated with the second coil is called mutual inductance between two coils. S.I unit of mutual inductance – Henry.